

Carbon Block Filters - Watts

Thick wall carbon construction for superior performance. Low cost for economy!

Top-of-the-line coconut shell carbon block filter cartridge for chlorine, taste, odor and sediment reduction.

- Competitively priced!
- Outperform GAC cartridges four ways:
 1. Superior chlorine reduction
 2. Lower pressure drop.
 3. Will not channel
 4. Lower cost
- 100% Coconut shell Carbon.
- Up to 99% chlorine reduction*.
- FDA grade components & materials.


Recommended Flow Rate

MODEL NO.	OD	LENGTH	GPM
F109009	2.5"	9-3/4"	1
F109020	2.5"	20"	2
WCBFF975	4.5"	9-3/4"	4
WCBFF20	4.5"	20"	8



Maximum operating pressure: 125 PSIG
 Operating temperature: 50° F to 125° F
 10° C to 52° C
 *Performance tested @ flow with 2ppm chlorine.

* Tested and verified by independent laboratory testing.

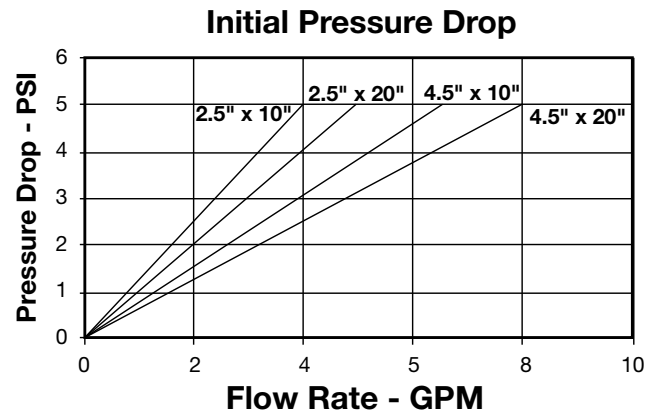

MODEL NO.	TYPE	OD	LENGTH	MICRON RATING*	CHLORINE REDUCTION*	NO. / CASE
F109009	Thick Wall	2.5"	9-3/4"	5 nominal	>4,000 Gal @ 1 gpm	25
F109020	Thick Wall	2.5"	20"	5 nominal	>8,000 Gal @ 2 gpm	25
WCBFF975	Thick Wall	4.5"	9-3/4"	5 nominal	>10,000 Gal @ 2 gpm	4
WCBFF20	Thick Wall	4.5"	20"	5 nominal	>20,000 Gal @ 4 gpm	4