

PULSAFEEDER®

The Pulsatron Series E-DC offers manual function controls over stroke length and stroke rate providing a turn down ratio of 100:1. Our best value in a pump with this capacity and powered by 12 Volt DC.

Four distinct models are available, having pressure capabilities to 150 PSIG (10 BAR) @ 6 GPD (0.25 lph), and flow capacities to 44 GPD (7.0 lph) @ 100 PSIG (7 BAR), with a turndown ratio of 100:1. Metering performance is reproducible to within $\pm 3\%$ of maximum capacity.

Features

- Powered by 12 Volt DC.
- Manual Control by on-line adjustable stroke rate and stroke length.
- Highly Reliable timing circuit.
- Water Resistant, for outdoor and indoor applications.
- Internally Dampened To Reduce Noise.
- Guided Ball Check Valve Systems, to reduce back flow and enhance outstanding priming characteristics.
- Few Moving Parts and Wall Mountable.
- Safe & Easy Priming with durable leak-free bleed valve assembly (standard).

Controls



Manual Stroke Rate

- Turn-Down Ratio 10:1

Manual Stroke Length

- Turn-Down Ratio 10:1

Operating Benefits

- Reliable metering performance.
- Rated "hot" for continuous duty.
- High viscosity capability.
- Leak-free, sealless, liquid end.



Aftermarket

- KOPkits
- Gauges
- Dampeners
- Pressure Relief Valves
- Tanks
- Pre-Engineered Systems
- Process Controllers (MicroVision)



PULSAtron® Series E-DC
Electronic Metering Pumps

PULSAtron® Series E-DC

Specifications and Model Selection

MODEL		LS02	LS13	LS14	LS44
Capacity nominal (max.)	GPH	0.25	0.50	1.00	1.85
	GPD	6	12	24	44
	LPH	0.9	1.9	3.8	7.0
Pressure (max.)	PSIG	150	150	100	100
	BAR	10	10	7	7
Connections:	Tubing	1/4" ID X 3/8" OD 3/8" ID X 1/2" OD			
	Piping	1/4" FNPT			

Engineering Data


Pump Head Materials Available:	GFPPPL PVC PVDF 316 SS
Diaphragm:	PTFE-faced CSPE-backed
Check Valves Materials Available:	
Seats/O-Rings:	PTFE CSPE Viton
Balls:	Ceramic PTFE 316 SS Alloy C
Fittings Materials Available:	GFPPPL PVC PVDF
Bleed Valve:	Same as fitting and check valve selected, except 316SS
Injection Valve & Foot Valve Assy:	Same as fitting and check valve selected
Tubing:	Clear PVC White PE

Important: Material Code - GFPPPL=Glass-filled Polypropylene, PVC=Polyvinyl Chloride, PE=Polyethylene, PVDF=Polyvinylidene Fluoride, CSPE=Generic formulation of Hypalon, a registered trademark of E.I. DuPont Company. Viton is a registered trademark of E.I. DuPont Company. PVC wetted end recommended for sodium hypochlorite.

Dimensions

Series E-DC Dimensions (inches)						
Model No.	A	B	C	D	E	Shipping Weight
LS02	5.0	9.6	9.6	6.5	8.2	10
LS13	5.0	9.9	9.5	6.5	8.5	10
LS14	5.0	9.9	9.5	6.5	8.5	10
LS44	5.0	10.6	11.4	7.5	9.2	15

NOTE: Inches X 2.54 = cm

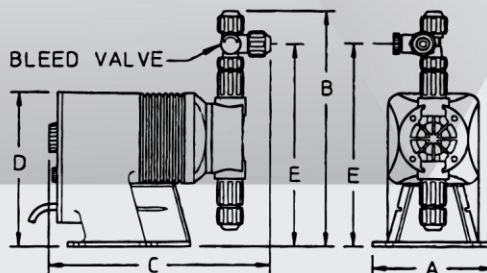

Engineering Data

Reproducibility:	+/- 3% at maximum capacity
Viscosity Max CPS:	
LS02, 13:	300 CPS
LS14, 44:	1000 CPS
Stroke Frequency Max SPM:	125
Stroke Frequency Turn-Down Ratio:	10:1
Stroke Length Turn-Down Ratio:	10:1
Power Input:	12.6 VDC Nominal Range 11.8-14.0 VDC
Average Current Draw:	
LS02, 13, 14 Amps:	4.0 Amps
LS44 Amps:	8.0 Amps
Peak Input Power:	
LS02, 13, 14 Amps: Power:	138.6 Watts
LS44 Amps: Power:	189 Watts
Average Input Power @ Max SPM:	
LS02, 13, 14 Amps: Power:	50.4 Watts
LS44 Amps: Power:	100.8 Watts

Custom Engineered Designs – Pre-Engineered Systems



Pre-Engineered Systems

Pulsafeeder's Pre-Engineered Systems are designed to provide complete chemical feed solutions for all electronic metering applications. From stand alone simplex pH control applications to full-featured, redundant sodium hypochlorite disinfection metering, these rugged fabricated assemblies offer turn-key simplicity and industrial-grade durability. The UV-stabilized, high-grade HDPE frame offers maximum chemical compatibility and structural rigidity. Each system is factory assembled and hydrostatically tested prior to shipment.



27101 Airport Road
Punta Gorda, FL 33982
Phone: ++1(941) 575-3800
Fax: ++1(941) 575-4085

www.pulsatron.com



An ISO 9001 Certified Company

EMP028 B15

